

## NetWay3012P

### PoE Adapter/Converters



Altronix Netway3012P provides simultaneous 12VDC and PoE/PoE+ outputs for applications including PoE cameras and external microphones, control boards, switching equipment, and more.



NetWay3012P

## Specifications

### Functions

Passes PoE+ and converts PoE to 12VDC  
Speed: 10/100 Mbps

### Output

Up to PoE+  
12VDC up to 2A  
30W max combined

### Indicators (LED)

**Yellow and Green LEDs:** IP Link status, 10/100/1000 Base-T/active  
**Green LED:** PoE ON  
**Red LED:** Power ON

### Agency Listings

CE European Conformity

### Physical and Environmental

#### Dimensions (W x L x H)

Enclosure: 3.8" x 2.5" x 1" (96.5mm x 63.5mm x 25.4mm)

Shipping: 8" x 6" x 5" (203.2mm x 152.4mm x 127mm)


#### Weight (approx.)

Product: 0.25 lb. (0.11 kg)  
Shipping: 0.3 lb. (0.14 kg)

#### Temperature

Operating: 0°C to 50°C (32°F to 122°F)  
Storage: -40°C to 70°C (-40°F to 158°F)  
**Relative Humidity** 85% +/- 5%  
**Operating Altitude** - 304.8 to 3,048m

## Typical Application

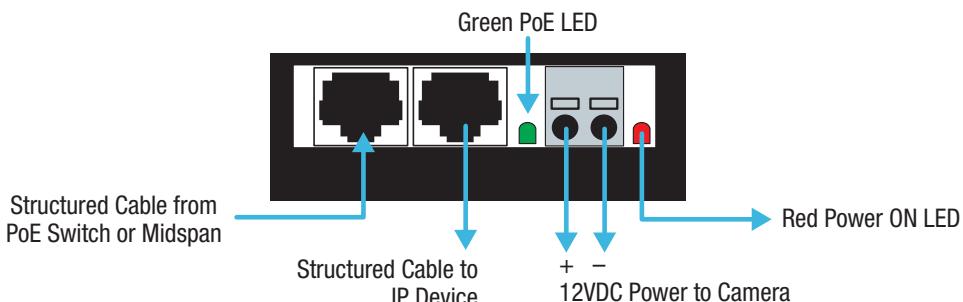

## Accessories



### DCL2 - DIN Rail Mounting Clip

Allows for easy installation of Altronix adapters utilizing screw mounting holes to mount on a standard DIN rail (Altronix Din Rail models D10, D12, D19, or D24).

### Lifetime Warranty