

NetWaySP3PL

3-port Hardened PoE Switch with Integral Power on a Backplane



Altronix NetWaySP3PL PoE+ Switch provides a 1Gb SFP port, two (2) 60W ports and a single 30W port. Cameras/edge devices may be located up to 100m from the unit. Embedded LINQ Technology allows you to monitor, control and report power and diagnostics from anywhere.



NetWaySP3PL

Key Features

- One (1) Gigabit SFP port.
- 120W total power:
 - Two (2) 60W ports (PoE/PoE+)
 - One (1) 30W port (PoE/PoE+)
- 10/100/1000 Mbps each port
- IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or 60W
- PoE activity LED indicators
- Built-in charger for sealed lead acid or gel type batteries
- Automatic switch over to stand-by battery when AC fails
- UL Listed in the U.S. and Canada
- CE European Conformity
- Lifetime Warranty

Similar products

NetWaySP3WPX	Outdoor 3-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries
NetWaySP3WP	Outdoor 3-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure
NetWaySP3WPN	Outdoor 3-port PoE+ Hardened Switch only in NEMA 4/4X, IP66-11 enclosure
NetWaySP3X	Indoor 3-port PoE+ Hardened Switch in NEMA 1 Rated indoor enclosure
NetWaySP3B	3-port PoE+ Hardened Switch (board only)

Accessories (order separately)



SFP Modules - Hot Pluggable Transceivers

P1MM	Multi-Mode SFP Module for distances up to 550m
P1SM10	Single-Mode SFP Module for distances up to 10km
P1AB2K	Single Strand SFP Module for distances up to 2km
P1GCE	Copper SFP Module for distances up to 100m




NetWaySP1A

Ethernet over Fiber Media Converter/Repeater for Applications Requiring an Additional SFP (Fiber) Port
NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).

Lifetime Warranty

Typical Application

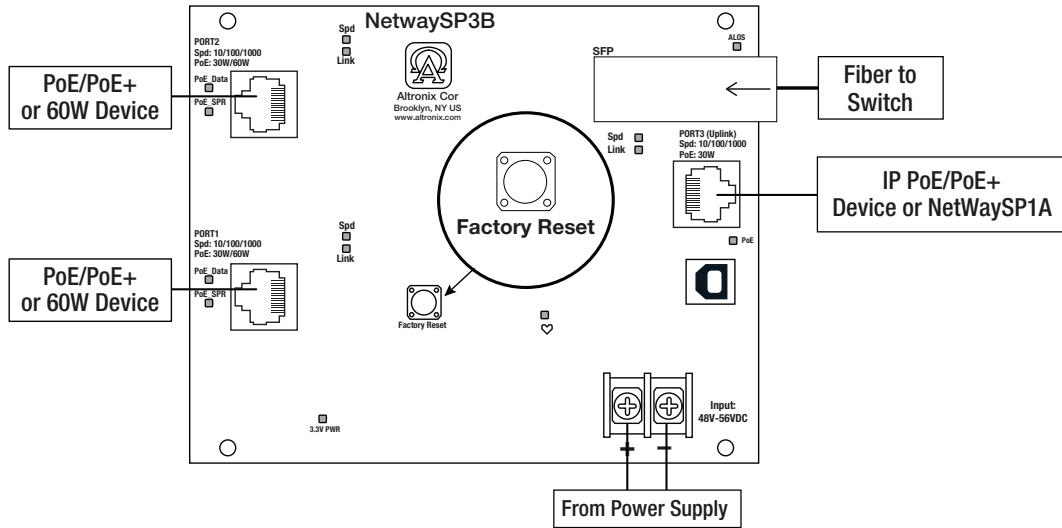

Lifetime Warranty

Specifications

3-port PoE+ Hardened Switch (NetWaySP3B):

Input

Voltage 56VDC from POE201

Power Output

Maximum Power Two (2) 60W ports (PoE/PoE+)
One (1) 30W port (PoE/PoE+)
IEEE 802.3at (30W),
IEEE 802.3af (15W) or 60W compliant
120W total power
Integral surge protection
Fiber Port: One (1) Gigabit SFP port
Ethernet Ports: Three (3) 10/100/1000 Mbps ports
Connectivity: RJ45, auto-crossover
Wire type: 4-pair CAT5 or
better structured cable
Distance: up to 100m
Speed: 10/100/1000 Mbps,
half/full duplex, auto negotiation

LINQ Technology:

Remote network management allows for camera/device reset and monitoring
Provides local and/or remote access to critical information via LAN/WAN
Email and Windows Dashboard Alert notifications report real-time diagnostics
Event log tracks history

Indicators (LED)

Individual PoE On LEDs for each port
Individual IP Link status, 10/100Base-T/active LEDs for each port
ALOS LED indicates fiber connection for SFP port
Heartbeat LED indicates proper operation of the unit

Power Supply/Charger (POE201):

Input

Voltage 115VAC, 60Hz, 2.5A or
230VAC, 50/60Hz, 1.3A
5A/250V

Output

Voltage 56VDC/120W
Current 2.2A continuous supply current
Maximum Power 120W total power
Integral surge protection

Battery Charging

Type Sealed lead acid or gel type
Failover Upon AC loss, instantaneous
Charging Circuit 48VDC, 0.75A
Batteries are sold separately

NetWaySP3PL:

Agency Listings:

CE European Conformity

Physical and Environmental

16 gauge stainless steel backplane with mounting holes.

Dimensions (H x W x D)

Backplane: 10.75" x 8.875" x 2.375"
(273.1mm x 225.4mm x 60.3mm)
Shipping: 12" x 10" x 8"
(304.8mm x 254mm x 203.2mm)

Weight (approx.)

Product: 2.6 lb. (1.18 kg)
Shipping: 4.0 lb. (1.81 kg)

Temperature

Operating: 60W: -40°C to 75°C (-40°F to 167°F)
75W: -40°C to 70°C (-40°F to 158°F)
100W: -40°C to 55°C (-40°F to 131°F)
120W: -40°C to 45°C (-40°F to 113°F)

Storage: -40°C to 85°C (-40°F to 185°F)

Relative Humidity 85% +/- 5%

BTU/Hr. (approx.) 61 BTU/Hr.

Operating Altitude: -304.8 to 2,000m

Lifetime Warranty


NetWaySP3PL

3-port Hardened PoE Switch with Integral Power on a Backplane

 Netway®
SPECTRUM**Dimensions and Drawing**

Backplane Dimensions (H x W x D approximate)

10.75" x 8.875" x 2.375" (273.1mm x 225.4mm x 60.3mm)

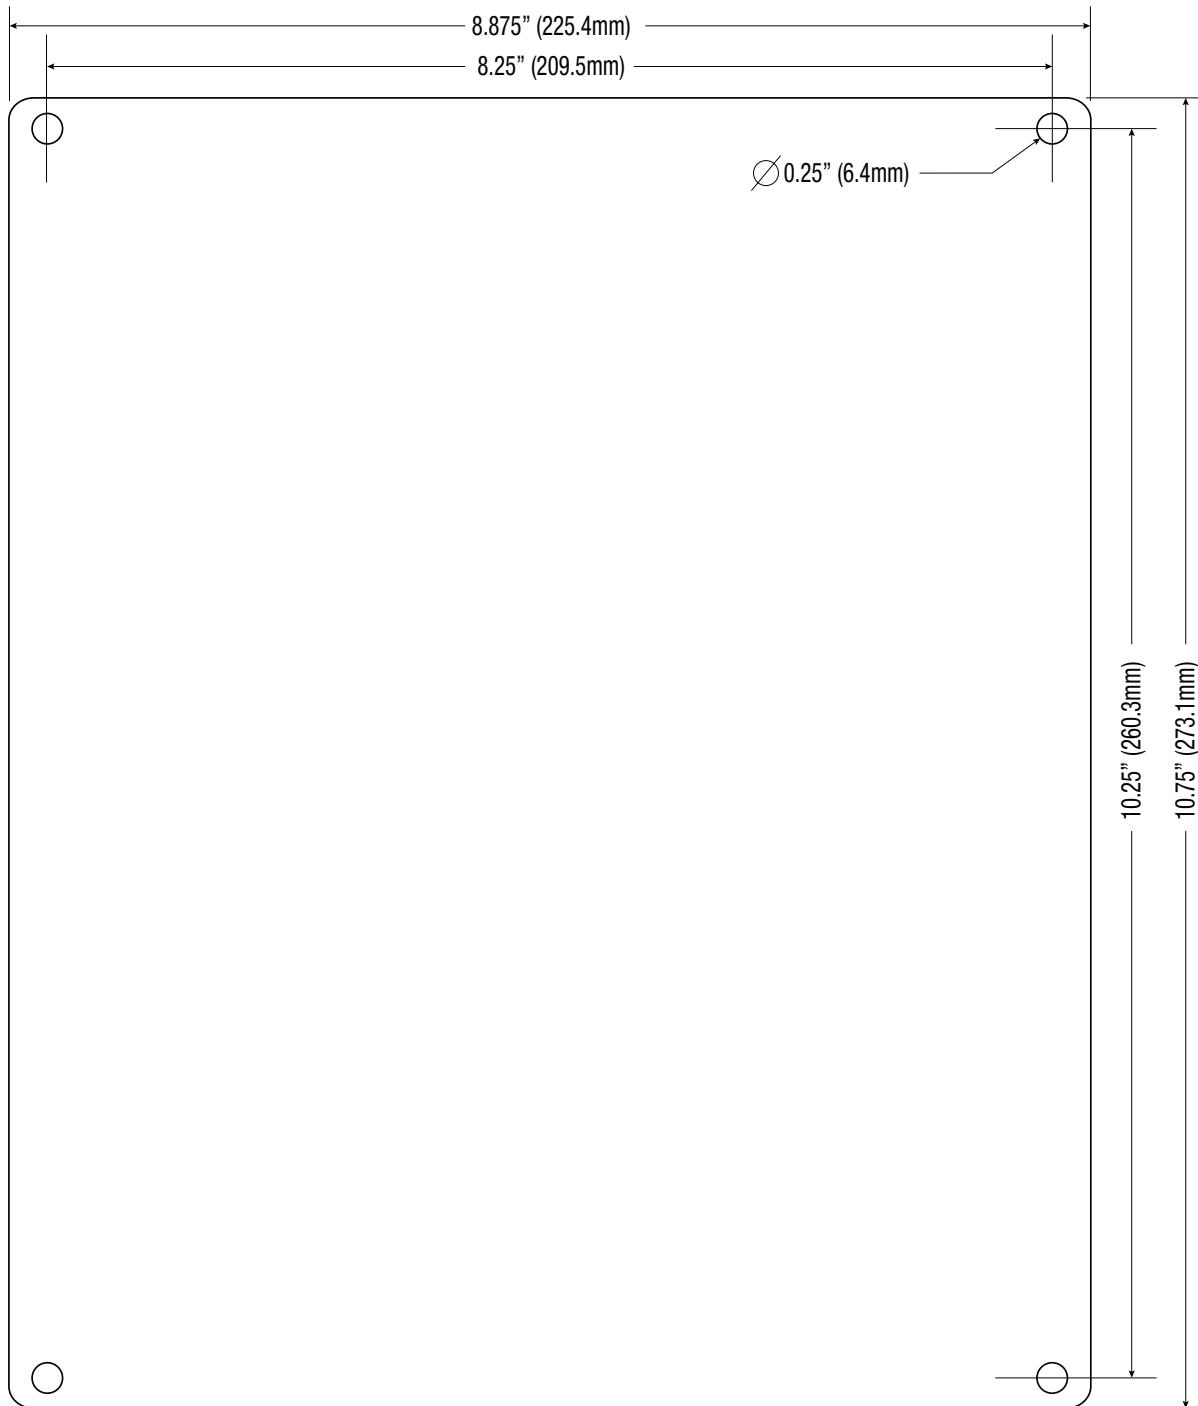**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com