


PD16W

UL Listed Power Distribution Module

Altronix PD16W UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into sixteen (16) individually fuse protected outputs.

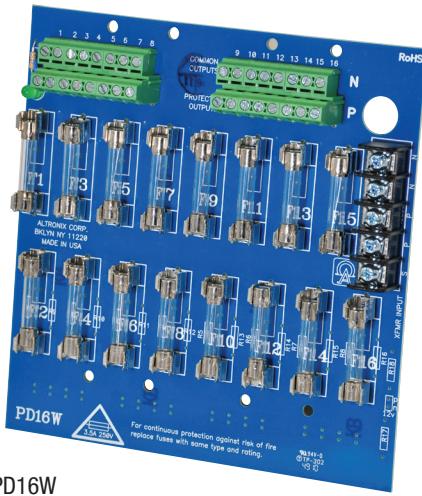

Specifications

Input

Voltage Range 12VDC or 24VDC, up to 10A or 24VAC or 28VAC, up to 12A

Outputs

Sixteen (16) fuse protected outputs

2.5A per output max.

Total output current should not exceed max current rating of power supply employed

Fuses are rated @ 3.5A/250V

Indicators (LED)

DC Output Power LED

Agency Listings

UL:

UL294
UL603
UL1481

Access Control
Burglar Alarm
Fire Alarm

cUL:

General Signaling Equipment Evaluated to
CSA Standard C22.2 No.205-M1983
Power Supplies for Burglar Alarm Systems ULC-5318-96

CE:

European Conformity

Physical and Environmental

Dimensions (L x W x H)

Board: 6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm)
Shipping: 8" x 6" x 5" (203.2mm x 152.4mm x 127mm)

Weight (approx.)

Product Weight: 0.4 lb. (0.18 kg)
Shipping Weight: 0.5 lb. (0.23 kg)

Temperature

Operating: 0°C to 49°C (32°F to 120°F)
Storage: -20°C to 70°C (-4° to 158°F)

Relative Humidity

85% +/- 5%

Mounting hardware is included

Lifetime Warranty


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Board Dimensions (L x W x H) and Drawing

6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm)

Mounting Holes' Tolerance: +/- 0.04 in. (1mm)

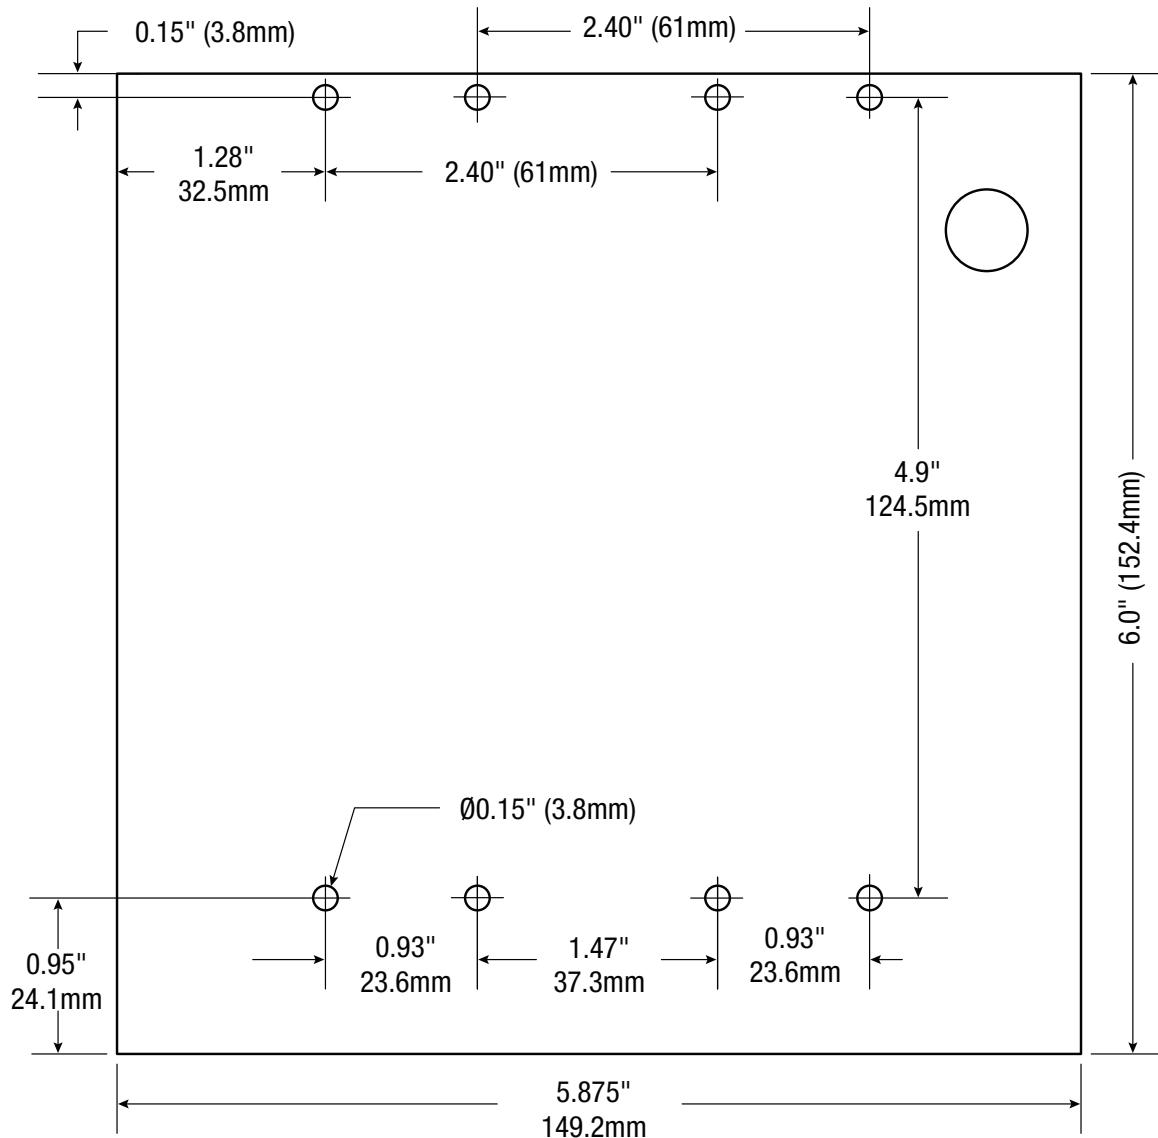**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com