


PD16WCB

UL Listed Power Distribution Module

Altronix PD16WCB UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into sixteen (16) PTC protected Class 2 Rated power-limited outputs.

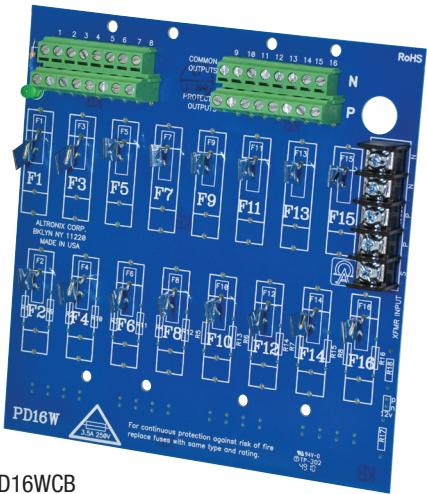

Specifications

Input

Voltage Range 12VDC or 24VDC, up to 10A or 24VAC or 28VAC, up to 12A

Outputs

Sixteen (16) PTC protected Class 2 Rated power-limited outputs (auto-resettable)
2A per output max.
Total output current should not exceed max current rating of power supply employed
PTCs are rated @ 2.5A

Indicators (LED)

DC Output Power LED

Agency Listings

UL:
UL294
UL603
UL1481

Access Control
Burglar Alarm
Fire Alarm

cUL:

General Signaling Equipment Evaluated to
CSA Standard C22.2 No.205-M1983
Power Supplies for Burglar Alarm Systems ULC-5318-96

CE: European Conformity

Physical and Environmental

Dimensions (L x W x H)

Board: 6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm)
Shipping: 8" x 6" x 5" (203.2mm x 152.4mm x 127mm)

Weight (approx.)

Product Weight: 0.4 lb. (0.18 kg)
Shipping Weight: 0.5 lb. (0.23 kg)

Temperature

Operating: 0°C to 49°C (32°F to 120°F)
Storage: -20°C to 70°C (-4° to 158°F)

Relative Humidity

85% +/- 5%

Mounting hardware is included

Lifetime Warranty


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Board Dimensions (L x W x H) and Drawing

6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm)

Mounting Holes' Tolerance: +/- 0.04 in. (1mm)

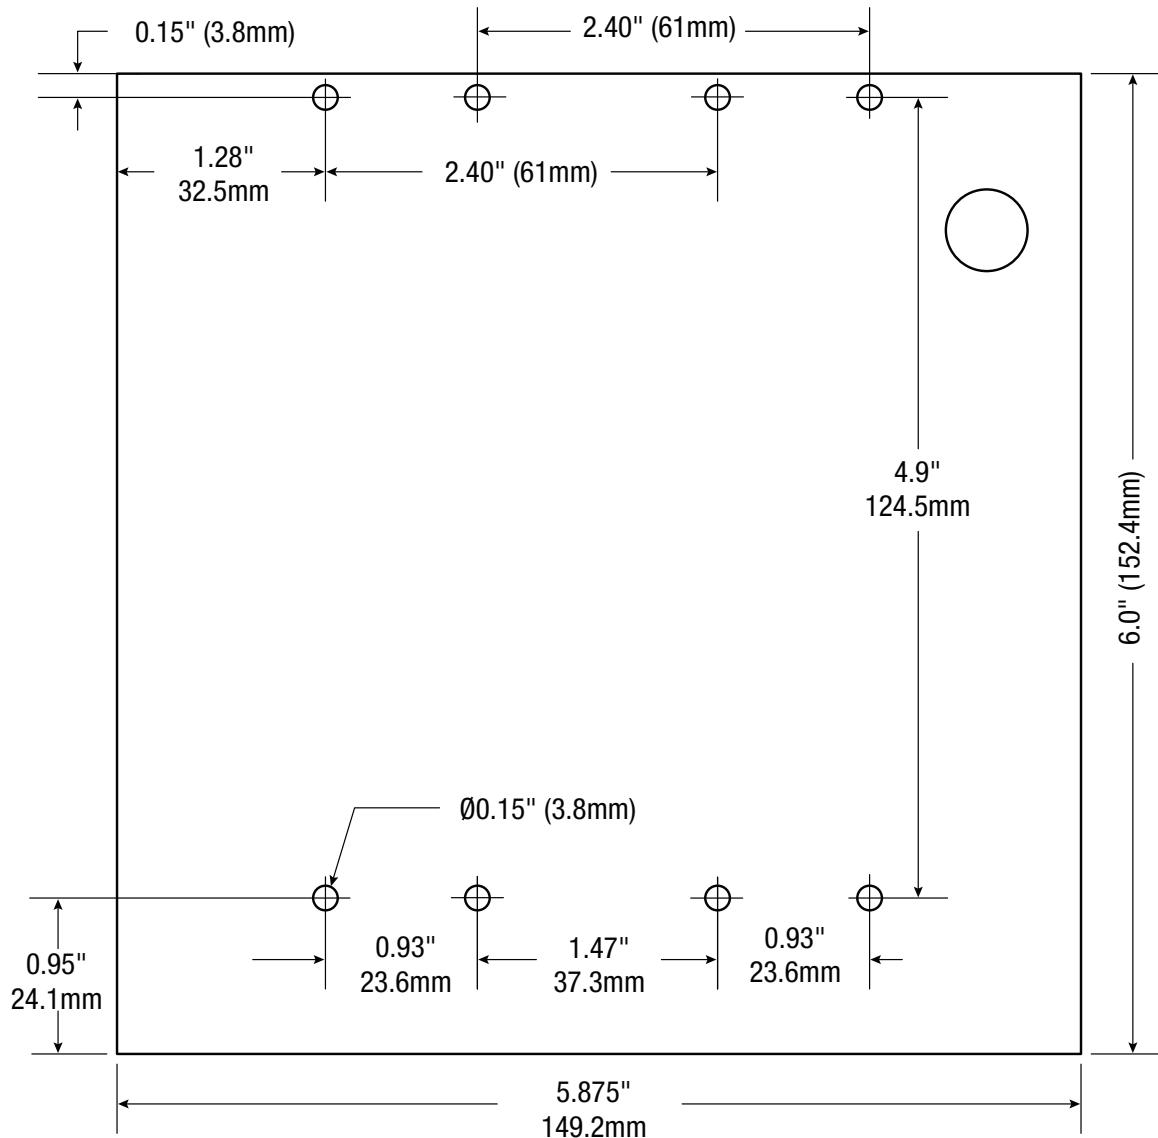**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com